

Attorney Docket: Y-189

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Yuji MATSUDA

Art Unit: 2853

S. N. 09/937,858

Examiner: B. L. Mouttet

Filed: September 28, 2001

For: IMAGE FORMING DEVICE

#11/Ltr Re;
+ translation
of prints
page
11 and
6/9/03

VERIFICATION OF A TRANSLATION

Assistant Commissioner for Patents
Washington, D. C. 20231

Sir:

I, the below named translator, hereby declare that:

My name and post office address are as stated below;

That I am knowledgeable in the English language and in the Japanese language, in which Japanese Patent Application No. 11-114534 was filed; and I believe the attached English translation to be a true and complete translation Japanese Patent Application No. 11-114534.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the above referenced application, any patent issuing thereon, or any patent to which this declaration is directed.

Date:

May 23, 2003

Mutsuhiko Yamano

FUJISAWA-CENTRAL BLDG. 6F, 1-4
KUGENUMA-TACHIBANA 1-CHOME
FUJISAWA-SHI KANAGAWA, 251-0024
JAPAN

1

[DOCUMENT NAME] REQUEST FOR PATENT

[REFERENCE NUMBER] 98178-4891

[TO] COMMISSIONER OF THE PATENT OFFICE

[IPC] B41J 2/21

[INVENTOR]

[ADDRESS] c/o Copyer Co., Ltd., 3-3, Shimorenjaku
6-chome, Mitaka-shi, Tokyo

[NAME] Yuji Matsuda

[APPLICANT]

[ID NUMBER] 000001362

[NAME] Copyer Co., Ltd.

[AGENT]

[ID NUMBER] 100098350

[PATENT ATTORNEY]

[NAME] Mutsuhiko Yamano

[INDICATION OF OFFICIAL FEE]

[DEPOSIT ACCOUNT NUMBER] 054254

[DEPOSIT AMOUNT] 21, 000

[LIST OF SUBMITTED ARTICLES]

[NAME OF ARTICLE] SPECIFICATION 1

[NAME OF ARTICLE] DRAWINGS 1

[NAME OF ARTICLE] ABSTRACT 1

[NUMBER OF GENERAL POWER OF ATTORNEY] 9603625

[PROOF] Needed

[DOCUMENT NAME] SPECIFICATION

[TITLE OF THE INVENTION] IMAGE FORMING DEVICE

[CLAIMS]

[Claim 1]

An image forming device that forms an image on a print paper in an ink jet recording method with a plurality of heads, comprising:

main scanning direction moving means for moving a carriage in a main scanning direction, said carriage having said plurality of heads mounted thereon;

paper conveying means for conveying the print paper in a sub-scanning direction;

pattern printing means for printing, with said plurality of heads, a predetermined test pattern;

pattern detecting means, mounted on said carriage, for detecting pattern elements of the test pattern printed on the print paper by said printing means;

binary conversion means for binarizing an output of said pattern detecting means;

position detecting means for detecting a position of the carriage in said main scanning direction; and

calculating means for moving said carriage to detect the pattern elements of the test pattern with said pattern detecting means, for detecting a print position of the pattern elements based on a detection result of said position detecting means when a rising and/or falling edge of a binary signal obtained by said binary conversion means is generated, and for calculating a mounting deviation amount of each head in said major scanning direction.

[Claim 2]

The image forming device according to claim 1 wherein, said position detecting means comprises low-resolution position detecting means based on a linear scale provided on a movement path of said carriage and high-resolution position detecting means for detecting a position more finely than a minimum unit determined by a resolution of said low-resolution

position detecting means.

[Claim 3]

The image forming device according to claim 1 wherein, for each head, said test pattern is at least one vertical bar extending in the sub-scanning direction substantially perpendicular to said main scanning direction.

[Claim 4]

The image forming device according to claim 1, wherein said test pattern includes, for each head and as a pattern element, at least one horizontal bar extending substantially in parallel with said main scanning direction, further comprising:

conveyance amount detecting means for detecting a conveyance amount of the print paper in the sub-scanning direction substantially perpendicular to said main scanning direction; and

measuring means for measuring the conveyance amount equal to or smaller than a minimum unit determined by a resolution of said conveyance amount detecting means,

wherein said calculating means moves the print paper, on which the test pattern is printed, with the use of said paper conveying means with respect to the carriage to detect the pattern elements of the test pattern with said pattern detecting means, detects the print position of the pattern elements based on the detection results of said conveyance amount detecting means and said measuring means when a rising and/or falling edge of the binary signal obtained by said binary conversion means is generated, and calculates an amount of mounting deviation of each head in said sub-scanning direction based on the print position of the pattern elements printed by each head.

[Claim 5]

The image forming device according to one of claims 1-4 wherein said pattern detecting means is a reflective sensor comprising a light emitting element and a light receiving element.

[Claim 6]

The image forming device according to claim 2 wherein said low-resolution position detecting means comprises a counter for counting a timing signal based on said linear scale and wherein said high-resolution position detecting means comprises a timer which is initialized by said timing signal and measures a time with a predetermined clock signal.

[Claim 7]

The image forming device according to claim 3 wherein said pattern printing means prints said vertical bar in a plurality of passes, and

said calculating means uses said pattern detecting means to detect the vertical bar at least two positions in a longitudinal direction of said vertical bar to obtain a print position of said vertical bar based on an average value of the detected results.

[DETAILED DESCRIPTION OF THE INVENTION]

[0001]

[TECHNICAL FIELD TO WHICH THE INVENTION PERTAINS]

The present invention relates to an image forming device that forms an image with the ink jet recording method.

[0002]

[BACKGROUND ART]

In the ink jet recording method, pulse signals are applied to a heater disposed in an ink-filled nozzle to heat the heater, to boil ink, and to cause the boiled ink to increase the vapor pressure to jet ink. To use this method on an image forming device, a plurality of nozzles are arranged to form one head, and a plurality of heads (for example, for jetting ink in cyan, magenta, yellow, black, and so on) are combined, to form a full-color image.

[0003]

[PROBLEMS TO BE SOLVED BY THE INVENTION]

Conventionally, when forming an image using a plurality of heads by the ink jet recording method, the problem is that a horizontal deviation between any two heads, as shown in FIG.

13(a), is sometimes introduced when the heads are mounted on a carriage at a factory at shipment time or when a service engineer or a user replaces one or more heads. (In the example shown in the figure, the head of cyan (C) is deviated from the correct position by W). This deviation sometimes generates vertical stripes at print time and results in an unevenly printed image. Similarly, a vertical deviation between any two heads introduced when the heads are mounted, as shown in FIG. 13(b), sometimes generates horizontal stripes and results in an unevenly printed image.

[0004]

In addition, on a device that uses a linear scale for establishing ink jet synchronization to jet ink at correct positions in the main scanning direction of the head, a jet position deviation (W) may occur during forward and backward printing depending upon the movement speed of the carriage, sometimes resulting in an uneven image printing. This deviation is caused by a delay generated before the ink is jetted from the time of passing the slit position as shown in FIG. 13(c).

[0005]

Therefore, when a color registration error (hereinafter called a registration deviation) occurs through the head replacement or for some other reasons, the individual recording heads must be registered (i.e. registration adjustment). A registration deviation amount must be detected before making the registration adjustment. There are two methods of detecting registration deviation amounts: one is to print a particular test pattern, designed to make a registration deviation readily detectable, on paper so that human beings can check the print result to manually detect a registration amount, and the other is to cause a sensor to read a test pattern to detect a registration deviation.

[0006]

The technology for reading the test pattern via a sensor is disclosed in Japanese Patent Laid-Open Publication No. Hei

7-323582. As shown in FIG. 14, the base head, one of a plurality of heads, and each of the other heads print a pattern made up of two parallel bars (pattern elements) to allow the sensor to read the same position of the parallel bars twice to detect the head deviation amount. That is, in the first scan, the sensor senses the width of each pattern element to calculate the center dot position thereof. Then, in the second scan, the sensor senses the width W_1 between the pattern elements of the base head, based on the center dot positions of the pattern elements. Repeating the above-described operation for the pattern element of the base head and those of the other heads to calculate the widths (distances) W_2, \dots , between the pattern elements of the base head and those of the other heads. Then, the head deviation amount ΔW is calculated based on the difference of those widths.

[0007]

To do so, a comparator 1502 converts the analog signal, which is output from a sensor 1501, into a binary (bi-level) signal as shown in FIG. 15. In the first scan, this binary signal is sampled in a predetermined timing in accordance with a timer 1503. Each time a pattern element is read, a CPU 1505 references the value of the timer 1503 to read the pattern width data of each of two pattern elements. After the scan is terminated, the distance from the edge of the pattern element to the center dot is calculated from the scan speed and the sampling frequency, based on the width data of each of two pattern elements. After that, setting the center value of each pattern element in the timer 1503 immediately before the pattern is read in the second scan causes the timer 1503 to output a carry signal at the time the carriage reaches the center position of the pattern element. By operating a timer 1504 using this carry signal, the distance between the center dot position of a pattern element and that of another pattern element is calculated. This is done for the pattern elements of the base head and for the pattern elements of the base head and other heads to calculate the head deviation amount ΔW .

[0008]

However, in this case, the signal is sampled in a predetermined timing. Therefore, the carriage speed varies during carriage scanning, from scan to scan, or from device to device due to various mechanical factors such as the tension of a drive belt connecting the carriage and the motor. This variation is accumulated in the sampling results, sometimes affecting the precision of registration adjustment. In addition, detecting each pattern-to-pattern width W_1 , W_2 , ... requires the carriage to scan twice, thus requiring a long detection time and, at the same time, doubling the accumulation variation.

[0009]

This applies also to the paper conveyance direction. Variations in the paper conveyance roller diameter, eccentricity, and gears connecting the motor to the roller generate accumulation variations in the accumulated sampling results.

[0010]

In view of the foregoing, it is an object of the present invention to provide an image forming device capable of precisely detecting a head deviation when the head has been replaced.

[0011]

In addition, variations in the shape or the direction of nozzles, introduced when manufacturing the head, will cause ink droplets to be jetted, not in exactly correct positions in a straight row as shown in FIG. 20(a), but in positions shifted vertically and/or horizontally as shown in FIGS. 20(b)-20(d). In the method described above in which a test pattern is read by the sensor to detect a registration deviation amount, two parallel pattern elements are printed by the base head and each of other heads. Then, the sensor reads the width of each pattern element from the edges of the pattern as well as the distance between the centers of the pattern elements of the base head and each of the other heads. Therefore,

variations in the edges of pattern elements are generated as described above, and those variations generate read errors.

[0012]

Also, when mounting a head 101 on a carriage 106, mechanical variations in the head 101 and the carriage 106 may cause the head 101 to be inclined with respect to the main scanning direction as shown in FIG. 21. In addition, the position at which a sensor 110 is mounted on the carriage 106 may vary according to the device. The head 101, if inclined with respect to the carriage 106, causes the pattern elements to be inclined as shown in FIGS. 22. On the other hand, if the sensor read positions in the longitudinal direction of the pattern element vary as indicated by A to D, detection errors up to the value d occur.

[0013]

As described above, there is a possibility in the conventional registration detection method that the pattern detection result varies greatly according to the manufacturing variations in the head 101, how the head 101 is mounted on the carriage 106, and how the sensor 110 is mounted.

[0014]

Therefore, it is another object of the present invention to provide an image forming device capable of detecting a test pattern more precisely in order to precisely detect a head deviation when a head has been replaced.

[0015]

[MEANS FOR SOLVING THE PROBLEMS]

An image forming device according to the present invention forms an image on a print paper in an ink jet recording method with a plurality of heads. The device comprises main scanning direction moving means for moving a carriage in a main scanning direction, the carriage having the plurality of heads mounted thereon; paper conveying means for conveying the print paper in a sub-scanning direction; pattern printing means for printing, with said plurality of heads, a predetermined test pattern; pattern detecting means, mounted on the carriage, for

detecting the pattern elements of the test pattern printed on the print paper by the printing means; binary conversion means for binarizing an output of the pattern detecting means; position detecting means for detecting a position of the carriage in the main scanning direction; and calculating means for moving the carriage to detect the pattern elements of the test pattern with the pattern detecting means, for detecting a print position of the pattern elements based on a detection result of the position detecting means when a rising and/or falling edge of a binary signal obtained by the binary conversion means is generated, and for calculating a mounting deviation amount of each head in the major scanning direction.

[0016]

In this way, the device according to the present invention detects the position of the carriage at a time of a change in the output from the pattern detecting means, allowing the position of the pattern element to be detected precisely without being affected by the carriage speed variations generated by mechanical causes. In addition, the mounting error of each head may be obtained by finding the position of the pattern element in one single scan and by comparing it with the indicated print position of the pattern.

[0017]

The position detecting means preferably comprise low-resolution position detecting means based on a linear scale provided on a movement path of the carriage and high-resolution position detecting means for detecting a position more finely than a minimum unit determined by a resolution of the low-resolution position detecting means. With this configuration it is possible to detect the position of the pattern element more precisely.

[0018]

The test pattern is, for example, at least one vertical bar extending in the sub-scanning direction substantially perpendicular to the main scanning direction.

[0019]

The test pattern may include, for each head and as a pattern element, at least one horizontal bar extending substantially in parallel with the main scanning direction. In this case, the device further comprises conveyance amount detecting means for detecting a conveyance amount of the print paper in the sub-scanning direction substantially perpendicular to the main scanning direction; and measuring means for measuring the conveyance amount equal to or smaller than the unit of the timer of the conveyance amount detecting means. The calculating means moves the print paper, on which the test pattern is printed, with the use of the paper conveying means with respect to the carriage to detect the pattern elements of the test pattern with the pattern detecting means, detects the print position of the pattern elements based on the detection results of the conveyance amount detecting means and the measuring means when a rising and/or falling edge of the binary signal obtained by the binary conversion means is generated, and calculates an amount of mounting deviation of each head in the sub-scanning direction based on the print position of the pattern elements printed by each head.

[0020]

The pattern detecting means, for example, may be a reflective sensor comprising a light emitting element and a light receiving element.

[0021]

The low-resolution position detecting means comprises, for example, a counter for counting a timing signal based on the linear scale, and the high-resolution position detecting means comprises a timer which is initialized by the timing signal and measures a time with a predetermined clock signal.

[0022]

Further, the pattern printing means may print said vertical bar in a plurality of passes and said calculating means may use said pattern detecting means to detect the vertical bar at least two positions in a longitudinal direction of said vertical bar to obtain a print position of said vertical bar

based on an average value of the detected results. This makes it possible to reduce errors in detecting the pattern position due to variations in the heads, conditions of heads or sensor mounted on the carriage.

[0023]

[EMBODIMENTS OF THE INVENTION]

Some embodiments of the present invention will be described more in detail with reference to the drawings.

[0024]

FIG. 1 is a diagram showing the general configuration of an ink jet image forming device in the form of a serial printer according to the present invention. Black, yellow, magenta, and cyan ink are supplied from the ink tanks to recording heads 101Bk, 101Y, 101M, and 101C each via an ink tube (both not shown). Each recording head 101 is driven by a head driver or the like in response to the recording signal corresponding to recording information from a main controller (not shown). This causes ink droplets to be jetted from the head 101 onto a print paper 102 for color recording.

[0025]

A sub-scanning motor (a paper conveyance motor) 103, which is a driving source for intermittently feeding the print paper 102, drives a conveyance roller 104 via gears. A main scanning motor 105 is a driving source that causes a carriage 106, with the recording head 101 thereon, to scan in the directions indicated by arrows A and B via a main scanning belt 107.

[0026]

When the print paper 102 that is fed and conveyed by the conveyance roller 104 reaches a print position, the paper conveyance motor 103 is turned off to stop the conveyance of the print paper 102. Before starting image recording on the print paper 102, the carriage 106 moves to the position of a home position (HP) sensor 108. Then, the carriage scans forward in the direction indicated by arrow A, and jets black, yellow, magenta, and cyan ink from the heads 101Bk-101C at

predetermined positions to record an image. After recording a specified width (called a band) of an image during one scan operation by the carriage 106, the carriage 106 stops and then starts backward scanning in the direction indicated by arrow B to return to the position of the home position sensor 108. During backward scanning, the paper conveyance motor 103 is driven to convey the print paper 102 by the amount of one band, which was recorded by the heads recording 101Bk-101C, in the direction indicated by arrow C. Repeating the scanning operation of the carriage 106 (and head 101) and the paper feed operation in this way records an entire image.

[0027]

A linear scale 109 provided next to, and in parallel with, the scanning path of the carriage 106 has slits provided therealong at a predetermined resolution. A transmission type optical sensor (1203 in FIG. 12) installed near the carriage 106 reads the slits on the linear scale 109 to obtain two signals each with its own phase (90 degrees out of phase). These signals are used to manage the position of the carriage 106 and, at the same time, synchronize the ink jet from the head 101.

[0028]

In this embodiment, a recording head with the resolution of 600 dots/inch and a linear scale with the resolution of 600 dots/inch are used to allow an image to be printed at 600 dots/inch.

[0029]

Also provided near the carriage 106 in this embodiment is a reflective type optical sensor 110. When any of the recording heads 101 on the carriage 106 cannot form a good image because any of plural recording elements are damaged or ink is not jetted from those elements, the head must be replaced. When some of a plurality of recording heads or all of them have been replaced or when the positional relationship among the plurality of recording heads is not correct for some reasons, the images, each formed in a color, are not registered correctly.

This is a serious problem because a good image cannot be obtained. Therefore, when a color deviation (registration deviation) occurs at head replacement time or for some reasons, the positions of the recording heads must be corrected for registration adjustment. To do so, a particular test pattern (print pattern) P is printed to allow the sensor 110 to read it for detecting a registration deviation amount. And, based on the detected registration deviation amount, the registration adjustment is made. The present invention is characterized most in the detection of this registration deviation amount, which will be detailed below.

[0030]

FIG. 2 is a block diagram showing the configuration of the control hardware of an image forming device in a first embodiment of the present invention. The image forming device shown in the figure, which comprises a print control unit 202 and the heads 101, is connected to an external device 201. The external device 201 -- a computer, an image reader, and some other device -- is a host unit which provides the image forming device with image data or commands required for recording.

[0031]

Connected to the print control unit 202 are the main scanning linear scale 109, a sub-scanning encoder 210, the main scanning motor 105, sub-scanning motor 103, sensor 110, and an operation panel 111.

[0032]

The print control unit 202 receives image data VDI from the external device 201 and controls the formation of an image on the print paper with the use of the heads 101. The print control unit 202 comprises a CPU 203, a head control unit 204, a main scanning counter 205, a sub-scanning counter 206, a main scanning timer 207, a sub-scanning timer 208, a pattern detector 209, and a carriage/paper feed servo control unit 211. Among of them, the CPU 203 provides an interface with the external device 201 from which the serial image data VDI is transferred and, at the same time, controls the entire

operation of the print control unit 202 including the memory and I/O devices.

[0033]

More specifically, upon receiving the serial image data VDI from the external device 201, the CPU 203 issues a command to the head control unit 204 to temporarily store several bands of image data VDI into the image memory. Image processing is performed for the stored image data VDI, and image data VDO is output as the heads 101 scan. At this time, when controlling the image memory (not shown), the CPU 203 may variably set the horizontal and vertical addresses from which data is to be read. This operation makes it possible to correct the head mounting positions by varying a position from which the image data VDO to be printed by each head is read.

[0034]

In this embodiment, the main scanning linear scale 109 and the sub-scanning encoder 210 are provided as shown in the figure. Two phase signals are output, each at the absolute position according to the movement amount; that is, when the main scanning linear scale 109 drives the carriage 106 with the main scanning motor 105 and when the sub-scanning encoder 210 feeds paper with the sub-scanning motor 103. The output from the main scanning linear scale 109 is used also as the print control synchronizing signal for outputting the image data VDO and, in synchronization with this signal, the image memory address signal is generated. Therefore, by changing an image memory address from which data is to be read, the registration deviation amount may be corrected on a linear scale basis in the main scanning direction, and on a head nozzle basis in the sub-scanning direction. Although not shown in the figure, the output of image memory data is delayed for the period of time that is set by the CPU 203 in synchronization with the synchronizing signal sent from the main scanning counter 205. This delay corrects a deviation less than the minimum interval detectable by the main scanning linear scale 109.

[0035]

The head control unit 204 also generates signals, such as a head block enable signal BE and a heater drive pulse signal HE, necessary for jetting ink. The image data VDO, block enable signal BE, and heater drive pulse signal HE, which are output from the head control unit 204, are transferred to the head 101. In the control circuit in the head 101, only the heaters of the nozzles whose image data VDO and enable signals (indicated by BE and HE) are enabled are turned on. Ink is jetted from those nozzles onto a print paper to form one column of an image as shown in FIG. 11. Repeating this operation by causing the head 101 to scan in the main scanning direction forms a one-band image. Then, the print paper advances a specified amount to form another one-band image. Repeating this control forms the entire image on the print paper.

[0036]

The carriage/paper feed servo control unit 211 receives the output from the main scanning linear scale 109 and the sub-scanning encoder 210 to feedback-control the drive speed, start, stop, and movement amount of the main scanning motor 105 and the sub-scanning motor 103 for positioning management.

[0037]

The operation panel 111 is used by the user to issue operation instructions to the image forming device, including instructions for the print mode, demonstration printing, recording head recovery operation and so on. Instructions in the cases of head replacement and registration deviation correction may also be issued from the operation panel 111.

[0038]

FIG. 10 shows the internal configuration of the head 101. Note that the figure shows the configuration of only one head. In FIG. 10, numerals 1001 and 1002 are shift registers, numerals 1003 and 1004 are latch circuits, numeral 1005 is a decoder circuit, and numeral 1006 is an AND circuit. Numeral 1007 is a transistor, and numeral 1008 is a heater.

[0039]

Image data VDO1 and VDO2 are serial binary data sent from the external device 201 in synchronization with the transfer clock CLK. This serial binary data is sequentially converted from serial to parallel by the shift registers 1001 and 1002. For each of video data VDO1 and VDO2, eight units of data are transferred and then latched by the LAT signal. In addition, a head composed of a plurality of nozzles is divided into n blocks (in this example, a 256-nozzle head is divided into 16 blocks), and the enable signal BE0-15 and the heater drive pulse signal HE are supplied, one pulse for each block. The transistor 1007 may be turned on only for the nozzles for which image data is enabled and, when the transistor is turned on, the corresponding heater 1008 is heated for jetting ink.

[0040]

In the image forming device, the decoder 1005 converts the enable signal BE from 4 bits to 16 bits. From each nozzle, ink is jetted when the enable signal BE, the bits from the video data VDO1 and VDO2, and heater drive pulse signal HE are all turned on.

[0041]

As shown in FIG. 3, each head is used to print the test pattern P composed of horizontal bars HB and vertical bars VB. In FIG. 3, the horizontal bars HB are pattern used to detect a vertical registration deviation amount, while the vertical bars VB are pattern used to detect a horizontal registration deviation amount. In FIG. 3, only four blocks of pattern elements of the test pattern P for detecting a registration deviation amount, which are printed when the carriage scans in the forward direction, are shown. If there is a difference in the registration deviation amount in the forward direction and that in the backward direction, the pattern elements for use in the backward direction may be provided.

[0042]

Although, in the figure, a plurality of bars are printed at an equal interval in the pattern element block for each color, the bars need not be at an equal interval. This is because,

when calculating a registration deviation amount, the deviation amount is calculated by comparing the indicated print position with the actual detection point.

[0043]

As described above, the sensor 110 is provided near the head (FIG. 1). After the test pattern shown in FIG. 3 is printed, the sensor 110 reads each pattern element to detect the registration adjustment amount.

[0044]

More specifically, after the horizontal bars HB shown in FIG. 3 are printed, the carriage 106 is moved so that the sensor 110 is positioned in the upstream of the patterns. After that, the print paper 102 is conveyed and, based on the output from the sensor 110, the pattern detector 209 in the print control unit 202 detects a position where the pattern density changes. That is, the analog signal from the sensor 110 is binarized and is sent to the interrupt input terminal of the CPU 203. The rising edge and the falling edge of the binary signal correspond to the edges of the above-described pattern element. Each time the rising edge and the falling edge are entered to the interrupt input terminal, the CPU 203 reads the values from the sub-scanning counter 206 and the sub-scanning timer 208 and temporarily stores data in the work memory.

[0045]

After reading all horizontal bars HB, the vertical bars VB are printed. After printing the vertical bars VB, the print paper 102 is moved so that the sensor 110 is positioned on the vertical bars VB. After that, the carriage 106 scans and, based on the output from the sensor 110, the pattern detector 209 in the print control unit 202 detects a position where the pattern density changes. At the same time, the analog signal from the sensor 110 is binarized and is sent to the interrupt input terminal of the CPU 203. As described above, each time the interrupt terminal receives the rising edge and the falling edge, the CPU 203 reads the values from the main scanning

counter 205 and the main scanning timer 207 and temporarily stores data in the work memory. After reading all vertical bars VB, the CPU 203 starts calculating the registration deviation amount.

[0046]

FIG. 4 is a diagram showing the internal configuration of the sensor 110 used in the image forming device. In the figure, numeral 401 denotes a light-receiving element -- either a phototransistor or a photo diode -- that has a band (or optical filter) covering the frequency of ink colors. Numeral 402 denotes a light-emitting element for emitting one of R, G, and B that are complementary colors of C, M, and Y. Numeral 403 denotes an optical lens that focuses light, emitted by the light-emitting element 402, on the registration deviation detection pattern P and, with the optical lens, condenses the reflected light on the light receiving element 401 to detect the presence of pattern elements. In this embodiment, the ink colors C, M, Y, and K are used, and the light emitting element that emits R, G, and B independently is used for identifying each ink color and the white of the background paper to allow the emission light to be switched according to the ink color.

[0047]

The output from the sensor 110 is used by the pattern detector 209 in the print control unit 202 to detect a change in the density of a pattern. FIG. 5 shows the details of the pattern detector 209.

[0048]

In FIG. 5, numeral 501 is a light-emitting element driving transistor, numeral 502 is an I-E amplifier that amplifies the current generated in the light-receiving element and converts the current to a voltage, and numeral 503 is an amplifier that further amplifies the output of the I-E amplifier 502. Numeral 504 is a comparator that converts the output of the amplifier 503 to a binary value, and numeral 505 is a D/A converter through which the CPU 203 sets the adjustment values to adjust the light emission amount of the light-

emitting element in the sensor 110 and the offset amount of the sensor 110. The output of the amplifier 502 is connected also to the analog-digital conversion input terminal of the CPU 203. To keep the sensor output at a predetermined level before detecting a registration deviation adjustment pattern, the CPU 203 uses this output to adjust the light emission amount of the light emission element in the sensor 110 and the offset of the output from the sensor 110. After adjusting the sensors, the registration deviation adjustment pattern is read to detect the pattern. In addition, the output of the comparator 504 is connected to the interrupt input terminal of the CPU 203. Each time the rising edge or the falling edge of a binary output from the comparator 504 is entered, the CPU 203 reads the values of the main scanning counter 205 and the main scanning timer 207 to detect a horizontal registration deviation, or the values of the sub-scanning counter 206 and the sub-scanning timer 208 to detect a vertical registration deviation, temporarily stores the data in the work memory and, after reading those values, calculates the registration deviation amount.

[0049]

FIG. 7 shows the relationship between the interrupt input and the main scanning linear scale when detecting a registration deviation amount in the main scanning direction in this embodiment. As shown in the figure, two phase signals, phase A and phase B, are output from the main scanning linear scale 109 as the carriage 106 moves. The main scanning counter 205 counts the rising and falling edges of phase A/phase B to measure the movement position of the carriage to the extent of the resolution provided with the linear scale 109. Within the time interval between the rising edge and the falling edge of phase A and phase B, the main scanning timer 207 counts shorter-period reference clocks at a predetermined interval to detect the carriage position more finely than it is detected by the main scanning linear scale 109. When an interrupt is sent from the sensor 110 to the CPU 203 at time T while the

carriage scan is performed to detect a registration deviation amount, the CPU 203 references the count values of the main scanning counter 205 and the main scanning timer 207 to detect, at a high resolution, the carriage position where the pattern element is detected. To do so, the timer 207 is initialized each time the interrupt occurs. It is desirable that the carriage be driven at a constant speed to minimize the timer measurement error.

[0050]

If the position of the pattern element was detected only by the main scanning counter 205 that counts the linear scale output, the resolution would depend only on the resolution of the linear scale 109 and, therefore, the registration deviation amount could not be detected precisely. In addition, if the signal was simply sampled in a predetermined timing with the use of the timer as in a conventional device, the mechanical variations would accumulate as described above.

[0051]

As described above, unlike the device in the prior art that has a configuration in which the timer is used to measure the distance between the pattern elements printed by the base head and the pattern printed by some other head (configuration in which the amount of deviation of the other head with respect to the base head is detected --- relative position comparison), the device according to the present invention has a configuration in which the head deviation amount is detected based on the dot position to be printed according to the linear scale and the dot position actually printed (absolute position comparison). This configuration requires only one scanning to detect the center dot position. Therefore, the error is not doubled and the detection error may be minimized.

[0053]

After reading the pattern, the CPU 203 reads data from the work memory and, based on the carriage position values for the rising edge and the falling edge, calculates the center dot position of each pattern. As shown in "state 1" and "state

2" in FIG. 8, the sensor output level slightly changes depending upon the paper type, paper floating, sensor accuracy, and light absorption ratio of a color. Therefore, when the comparator 504 binarizes the signal using a fixed threshold, there might be variations in the rising edge positions and falling edge positions in certain cases. To solve this problem, the center position is calculated based on both edge positions. This calculation method always gives a reliable output result because the center position remains unchanged in most cases even when there are variations described above. After that, the difference between the center dot position (indicated value) of each pattern element to be printed and the actual measurement value is calculated. In the example in the above test pattern, the deviation amounts at the center dot positions of a plurality of parallel bars for each color are calculated and then averaged. The registration deviation amount may be calculated from the head position difference obtained in this way.

[0054]

An example of a difference in the registration deviation amount will be described with reference to FIG. 9. In the figure, the white circle "○" indicates a dot position at which a dot is to be printed, with the range indicated by the main scanning linear scale count values 16 hex to 1C hex. The black circle "●" indicates that the actual print position has been shifted in the range 17 hex to 1D hex. The center dot position of the pattern element to be printed is 19 hex while the center dot position of the pattern element whose print has been shifted because of a registration deviation is 1A hex. As a result, a one-dot registration deviation is generated. Although a position deviation less than one dot in size may actually occur, a one-dot deviation is shown in the description for convenience.

[0055]

Performing the operation described above for the pattern (HB) for detecting a vertical registration deviation and for

the pattern (VB) for detecting a horizontal registration deviation detects a vertical/horizontal head mount deviation.

[0056]

To correct the ink jet positions of each head based on the head registration deviation amount that was detected as described above, the CPU 203 variably changes the address from which, and the timing in which, data is to be read from the image memory in the head control unit 204. In the main scanning direction, the jet positions may be corrected at a resolution more than the resolution (less than the minimum unit interval) of the main scanning linear scale 109. In the sub-scanning direction, the jet position may be corrected on a nozzle basis of the head 101.

[0057]

Although the correction in the sub-scanning direction may be made only on a nozzle basis in this embodiment, the sub-scanning timer 208 is used to find a registration deviation amount in the sub-scanning direction with a resolution equal to or greater than the resolution of the sub-scanning encoder 210. The reason is that, when a decimal fraction is generated during the detection and calculation of a registration deviation amount in the sub-scanning direction, which nozzle, upper or lower, will minimize the registration deviation amount must be decided. Therefore, the sub-scanning timer 208 in the sub-scanning direction need not be so precise as the timer in the main scanning direction.

[0058]

In the embodiment described above, a method for detecting a vertical/horizontal registration deviation in a single detection operation has been described. However, a single detection operation sometimes results in the detection result changing each time the deviation is detected because of variations in the sensor output signal level determined by the precision of the sensor 110, variations in linear scales introduced during manufacturing, and variations in the carriage speed. This problem may be solved by increasing the

number of detections or patterns and by calculating its average.

[0059]

Next, a second embodiment of the present invention will be described. The configuration of an image forming device in this embodiment is similar to that shown in FIGS 1 and 2 except the internal configuration and operation of the head control unit 204.

[0060]

FIG. 16 shows an example of the internal configuration of the head control unit 204. The head control unit 204 generally comprises an image memory 301, an image memory control unit 302, a mask memory 303, a mask control unit 304, and a heater drive signal generator 305.

[0061]

The image memory control unit 302 performs memory control as follows. That is, it temporarily stores into the image memory 301 several bands of serial image data VDI transferred from the external device 201 as described above and, as the head 101 scans, it outputs the stored image data to the head 101 as the image data VDO. When storing the image data VDI into the image memory 301, the unit generates the memory address signal in synchronization with the timing in which data is transferred from the external device 201 and sequentially stores the image data VD. When outputting the image data from the memory as the head 101 scans, the unit generates the memory address signal in synchronization with the synchronizing signal output from the main scanning counter 205 that counts the output from the main scanning linear scale 109 and outputs the image data VD from the memory.

[0062]

The mask control unit 304 thins out a predetermined amount of data from the image data to smooth an image density unevenness generated by the variations in the nozzle shape and direction introduced during head manufacturing so that the control unit causes the same band to be scanned several times

to print an image with the 100% of duty (This print method is generally called multi-pass recording).

[0063]

An example of multi-pass recording will be described with reference to FIGS. 17(a) and 17(b), in which, for simplicity, a single ink color head composed of 16 nozzles is shown. In the first scan, the dots of pattern A are recorded. "●" indicates a dot that is recorded in this scan. Then, after the paper is fed 1/4 (four dots wide) of the head recording width in the paper conveyance direction, the dots "⊗" of pattern B are recorded in the second scan. In the figure, "○" indicates a dot that has already been recorded. In the third scan, the dots "●" of pattern C are recorded and, finally, the dots "●" of pattern D are recorded in the fourth scan. This sequential processing completes recording. That is, by feeding paper four dots at a time and sequentially recording patterns A-D, a four-dot recording area is completed in each of four scans. This recording method differs from one-time scan (single-pass) recording method in that a four-dot recording area is sequentially recorded using four nozzles, at a time, that are in different portions of a head. This method ensures a high-quality image with little or no unevenness. The multi-pass recording method also has an advantage that an image is recorded while drying it.

[0064]

There are several methods for generating pass data for each scan. For example, pass data is generated by using a fixed mask pattern to thin out recording data as described above (called fixed thinning-out), by using a random mask pattern where recording dots and non-recording dots are randomly arranged to thin out recording data (called random thinning-out), or by thinning out recording dots according to the data (called data thinning-out).

[0065]

To achieve multi-pass recording described above, the mask control unit 304 thins out a predetermined amount of data

from image data VD output from the image memory control unit 302. A mask pattern is written in the mask memory 303 by the CPU before data is printed, and is read from the mask memory 303 in synchronization with the image data VD output from the image memory control unit 302 when the data is printed. Only the data corresponding to a portion where both the mask pattern and the print data are ON is output to the head 101 as the output data VDO.

[0066]

As described above, the heater drive signal generator 305 generates the signal that selects which block in the head to drive (block enable signal (BE0-3)) and the heater drive pulse signal HE in synchronization with the synchronizing signal output from the main scanning counter 205 that counts the output of the main scanning linear scale 109. From the head 101, ink is jetted from only the nozzles where the block enable signal BE0-3, the heater drive pulse signal HE, and the image data VDO are all enabled.

[0067]

Although the test pattern used in the second embodiment looks externally the same as that shown in FIG. 5, the vertical bar VB is printed in multiple passes in the multi-pass recording method described above. FIG. 18 shows the print result. FIG. 18(a) shows the print result produced by printing the vertical bar pattern in a single pass (the pattern is formed in the single pass of the carriage with no data thinned out with the use of a mask), as in the conventional method, using a head mounted with skew on the carriage. In this case, the print result directly reflects the head skew. On the other hand, FIG. 18(b) shows the result produced by printing the vertical bar in four passes according to the mask method described above. Although the print result in FIG. 18(b) may look more uneven, the uneven printing in the print result in FIG. 18(b) can be averaged more easily, considering the variation in the shape or direction of the nozzles produced during head manufacturing. (To illustrate the edge errors of pattern elements for detecting

a registration deviation amount, the figure shows only a print result produced when the head is mounted with skew). When the read range of the sensor in the sub-scanning direction is four dots, a serious error would be generated in FIG. 18(a) in the bar edge detection positions if the positions at which the pattern is read differ largely in the longitudinal direction of the bar. For example, there is an error E between position A and position C. On the other hand, in multi-pass printing in FIG. 18(b), such an error is not generated or extremely slight if generated.

[0068]

For example, as shown in FIG. 19(a), consider that head C is inclined toward the right and head K is inclined toward the left and that the sensor is installed on the carriage such that the sensor senses the bottom area of the pattern. If a registration deviation is detected and corrected in this situation in the conventional method, the corrected result is as shown in FIG. 19(b) in which dots in the top of the pattern overlap each other and the error E is generated in the bottom of the pattern. On the other hand, if the pattern elements of the vertical bar are printed in multiple passes by the device according to the present invention, the corrected result is as shown in FIG. 19(c) in which the patterns overlap at the center and the maximum error of up to $E/2$ is detected at the top and the bottom. The more passes of multi-pass printing, the better the result.

[0069]

The sensor 110 is located near the heads. After the patterns as shown in FIG. 5 is printed, the sensor 110 reads each pattern to detect the registration adjustment amounts.

[0070]

The vertical bar VB is scanned repeatedly at two or more positions as in positions A, B, and C in FIG. 18 (three positions in this embodiment) and the values that have been read are averaged. The reason is as follows. Even when printing in multiple passes, a slight error is generated in the read

positions because of the vertical direction variations or twists in the nozzles or an error in the paper feed amount. To further smooth the errors, multiple read operations may be performed while changing the read position in the longitudinal direction of the bar, to minimize the error.

[0071]

While preferred embodiments of the present invention have been described, it is to be understood that changes and variations may be made without departing from the scope of the claims of the present invention.

[0072]

[Effects of The Invention]

According to the invention, there is provided an image forming device capable of precisely detecting a head deviation when the head has been replaced. The device minimizes a detection error that may be generated because of variation in the movement speed of the carriage or a print paper, allowing a head registration deviation to be detected precisely. Because a pattern may be detected in a single scan of a test pattern in principle, the time to detect an error in the head mounting position may be reduced.

[0073]

In addition, a vertical bar pattern is printed in multiple passes, the pattern is detected repeatedly in two or more positions, and the detection results are averaged to calculate a registration deviation amount. This method further reduces the effect of variation in the shape and direction of nozzles introduced during head manufacturing, head mounting skews, and variation in the installation of the sensor on the carriage.

[BRIEF DESCRIPTION OF THE DRAWINGS]

[FIG. 1] is a diagram showing the main unit of an image forming device in an embodiment of the present invention.

[FIG. 2] is a diagram showing the control block in the embodiment of the present invention;

[FIG. 3] is a diagram showing a test pattern (print pattern) used in the embodiment of the present invention;

[FIG. 4] is a diagram showing the configuration of a sensor used in the embodiment of the present invention;

[FIG. 5] is a diagram showing the configuration of a pattern detector used in the embodiment of the present invention;

[FIG. 6] is a diagram showing a print pattern and the sensor output timing in the embodiment of the present invention;

[FIG. 7] is a diagram showing the timing in which a linear scale output is obtained when an interrupt is received in the embodiment of the present invention;

[FIG. 8] is a diagram showing how the sensor output changes when a paper floating occurs in the embodiment of the present invention;

[FIG. 9] is a diagram showing an example of print results in the embodiment of the present invention;

[FIG. 10] is a diagram showing the internal circuit of a head in the embodiment of the present invention;

[FIG. 11] is a diagram showing an image formation procedure in the embodiment of the present invention;

[FIG. 12] is a diagram showing the configuration of a linear scale and a print timing in the embodiment of the present invention;

[FIG. 13] is a diagram showing print results when a head is deviated in position;

[FIG. 14] is a diagram showing a print pattern used to detect a registration deviation in a conventional method;

[FIG. 15] is a diagram showing a control circuit used to detect a pattern in the conventional method;

[FIG. 16] is a diagram showing the internal block of a head control unit in a second embodiment of the present invention;

[FIG. 17] is a diagram showing how multi-pass printing is performed in the embodiment shown in FIG. 16;

[FIG. 18] is a diagram showing the difference in print results between single-pass printing and multi-pass printing in the embodiment shown in FIG. 16;

[FIG. 19] is a diagram showing a head that is inclined and print results in the embodiment show in FIG. 16;

[FIG. 20] is a diagram showing how head manufacturing variations affect the jet of ink;

[FIG. 21] is a diagram showing variations in the mounting of a head on a carriage; and

[FIG. 22] is a diagram showing how variations in the mounting of a head on a carriage affect the jet of ink.

[EXPLANATION OF REFERENCE SYMBOLS]

101 head

102 print paper

103 sub-scanning motor (paper conveyance motor)

104 conveyance roller

105 main-scanning motor

106 carriage

107 main-scanning belt

108 home position sensor

109 linear scale

110 sensor

203 CPU

204 head control unit

205 main-scanning counter

206 sub-scanning counter

207 main-scanning timer

208 sub-scanning timer

209 pattern detector

210 sub-scanning encoder

211 carriage/paper feed servo control unit

P print pattern (test pattern)

[NAME OF DOCUMENT] ABSTRACT

[ABSTRACT]

[OBJECT] is to precisely detect a head deviation when a head has been replaced.

[MEANS TO SOLVE] A plurality of heads 101 print a predetermined test pattern under the control of a head control unit 204 in order to precisely detect a head deviation, the printed test pattern is read by a sensor 110 and detected by a pattern detector 209. Every time an interrupt signal corresponding to the edge of a detected pattern element is input to the CPU 203, values of a main scanning counter 205/main scanning timer 207 (and/or a sub-scanning counter 206/sub-scanning timer 208) are read, the printing position of each pattern element is detected from the values, and the mounting deviation of the head is calculated based on the detection result of the printing position of each pattern element printed by each head. The vertical bar of a test pattern may be printed in multiple passes. A plurality of edges may be detected at different longitudinal positions of the bar and the detected results are averaged to determine an edge position.

[SELECTED FIGURE] Figure 2



NAME OF DOCUMENT

【書類名】

図面 DRAWINGS

【図 1】 FIG. 1

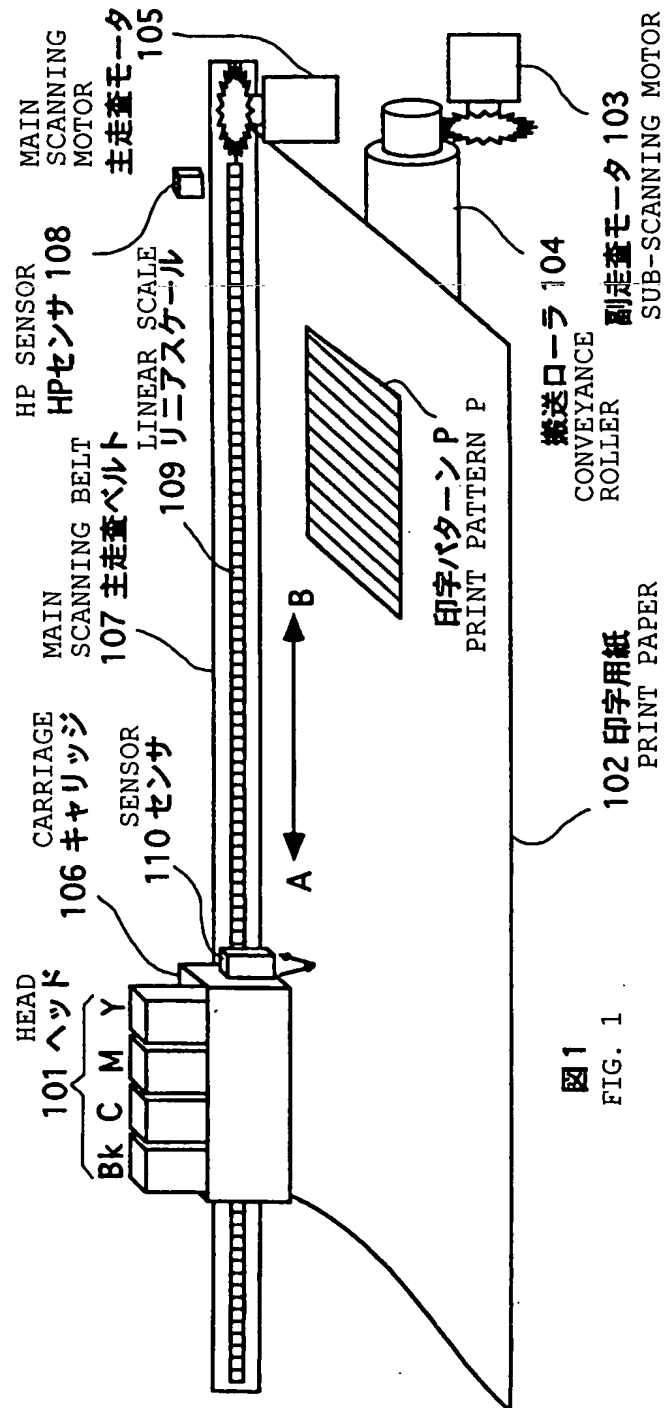


図 1

FIG. 1

【図 2】
FIG. 2

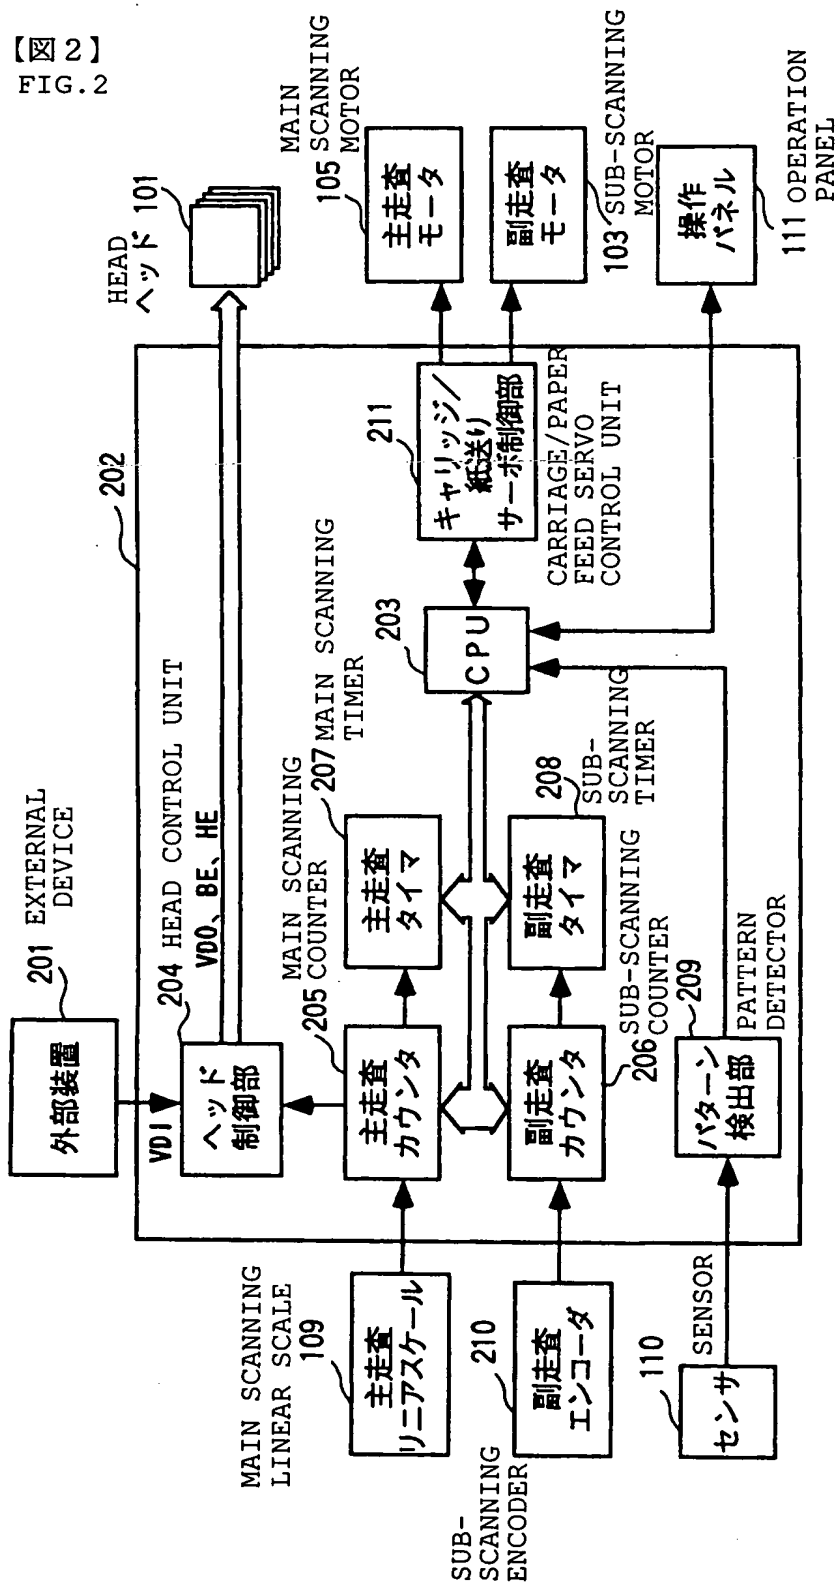


図 2 FIG. 2



【図3】
FIG.3

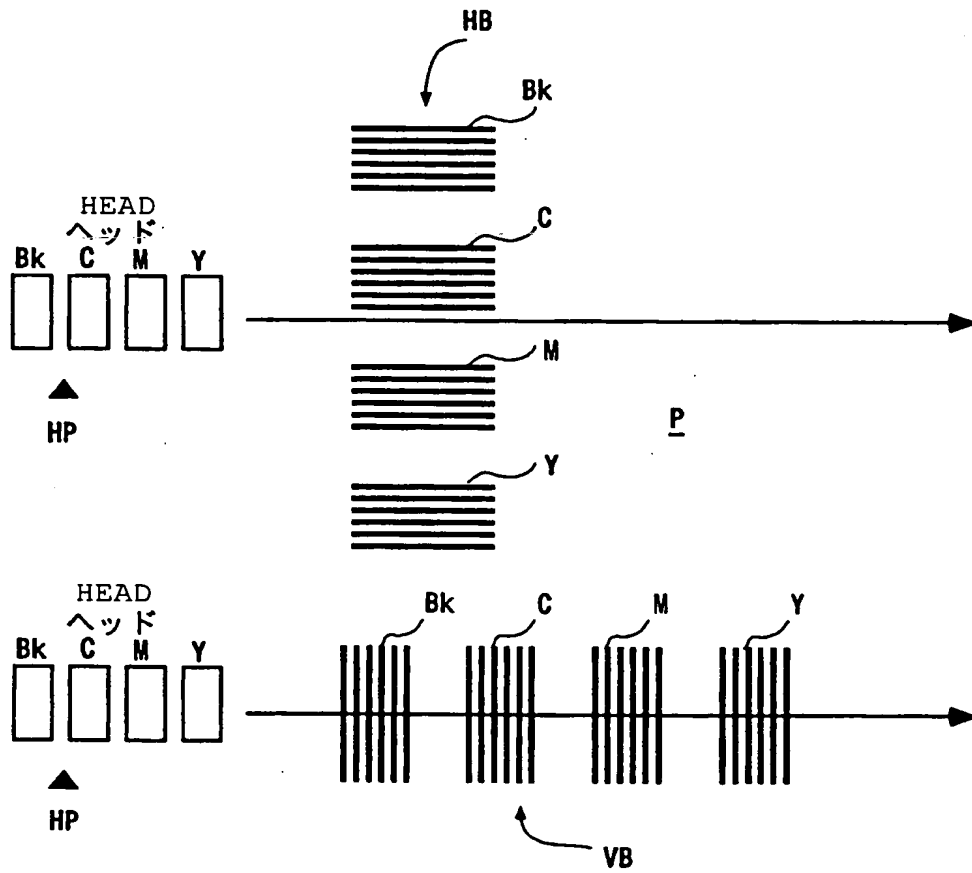


図3
FIG.3



【图4】
FIG. 4

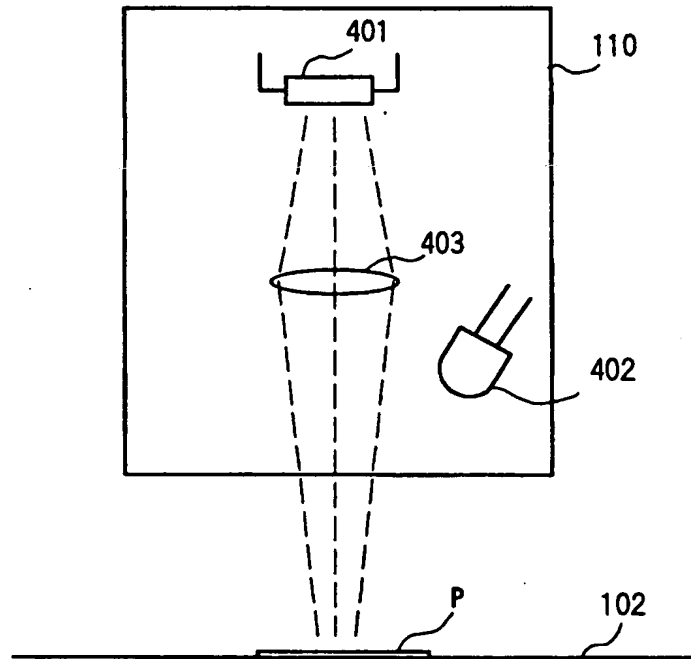


图 4
FIG. 4



【図 5】
FIG. 5

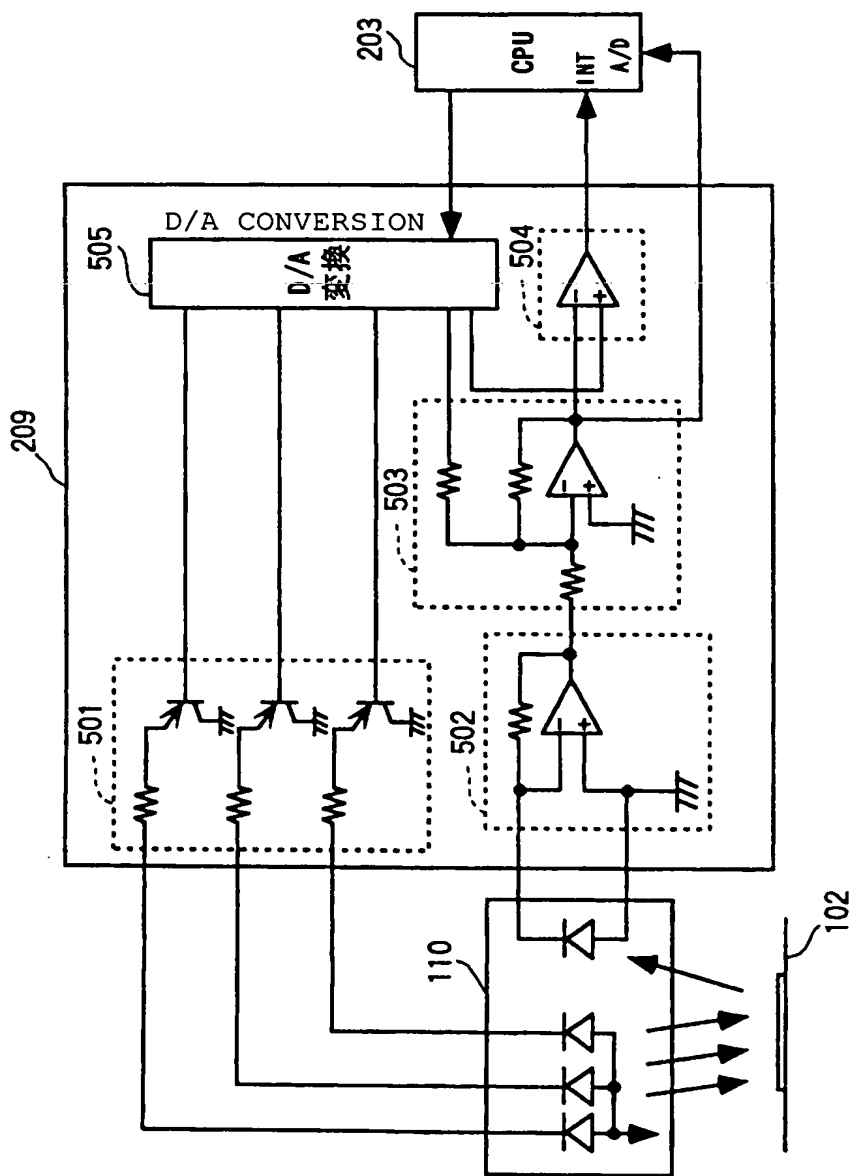


図 5
FIG. 5



【図6】
FIG.6

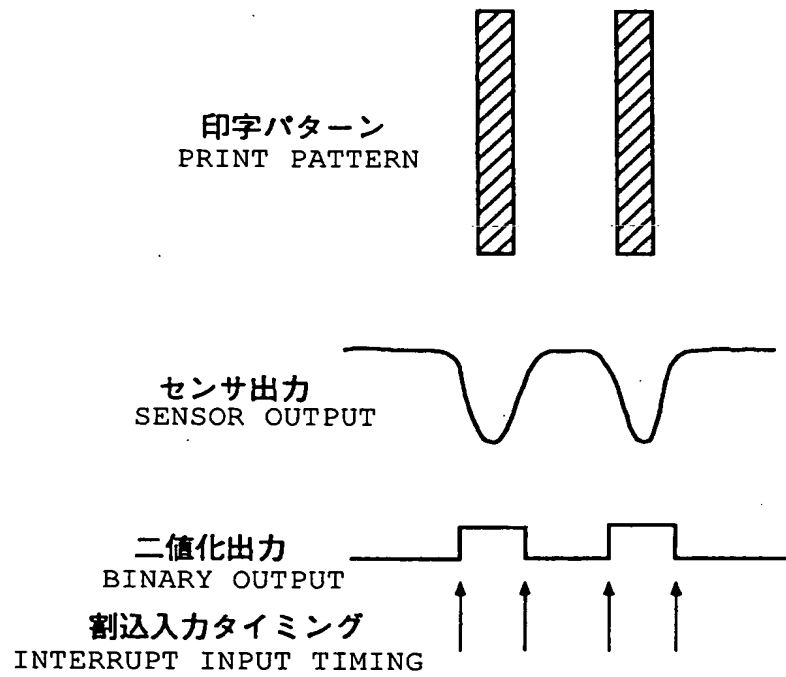


図6
FIG.6



【図 7】
FIG. 7

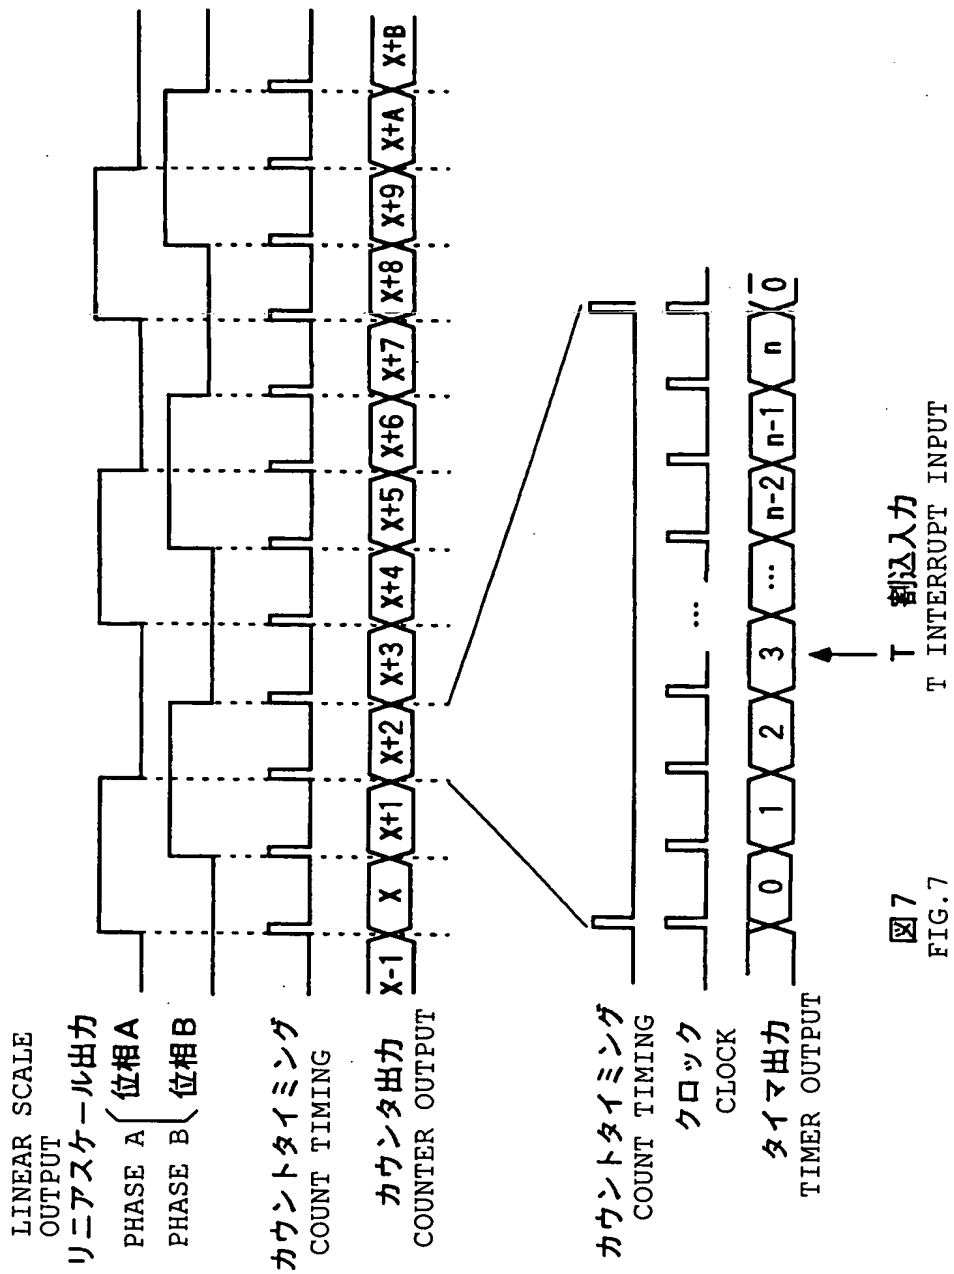


図 7
FIG. 7



【図 8】
FIG. 8

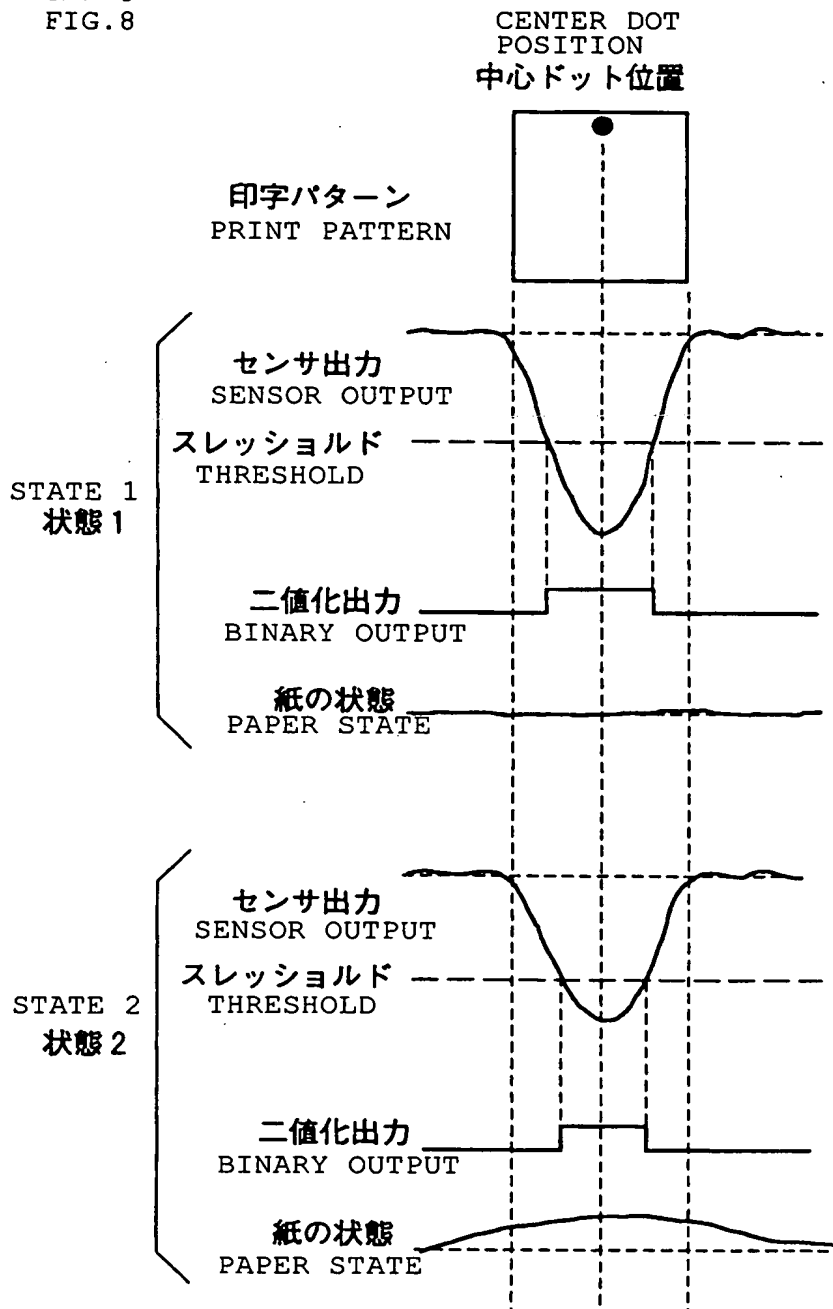


図 8
FIG. 8

【図 9】
FIG. 9

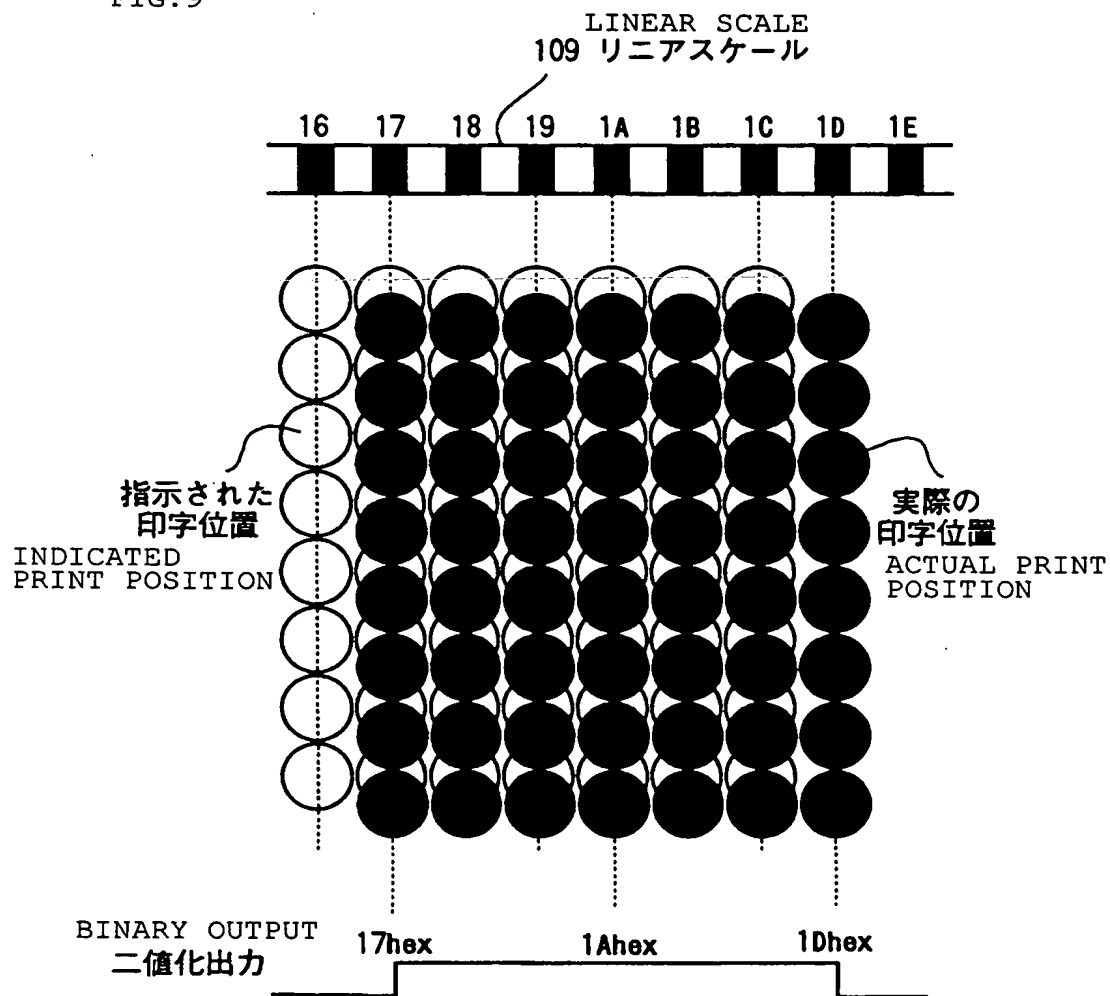


図 9
FIG. 9



【図10】
FIG.10

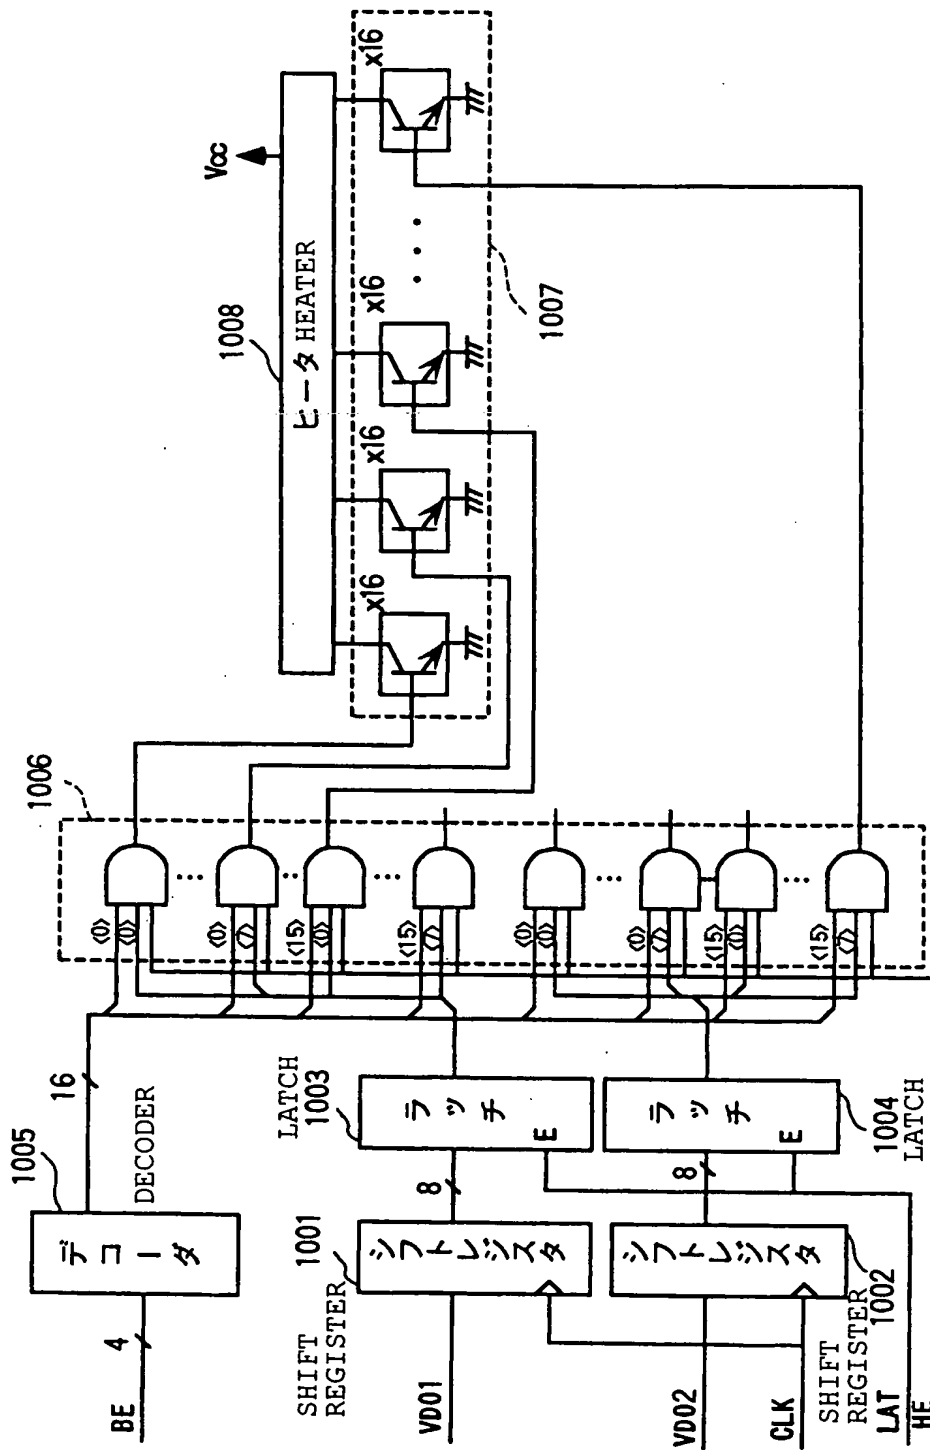


図10
FIG.10



【図 1 1】
FIG.11

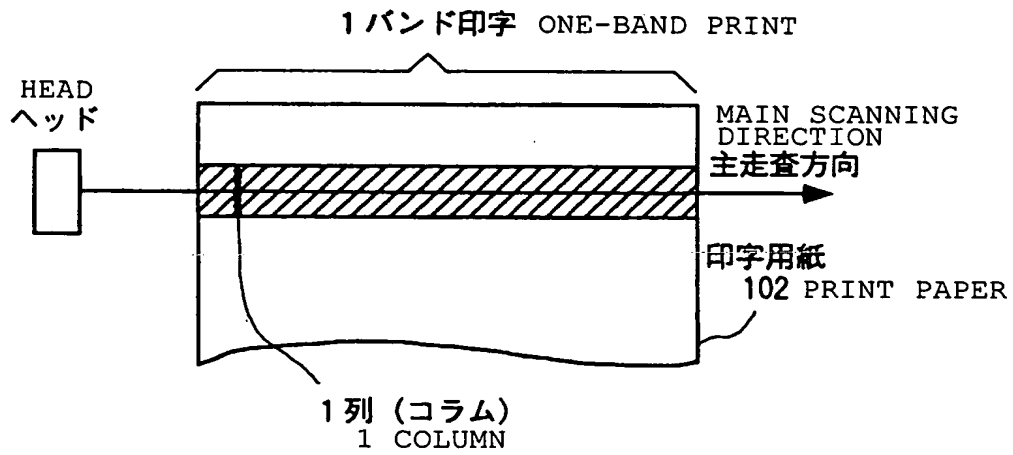


図 1 1
FIG.11

【図 1 2】
FIG.12

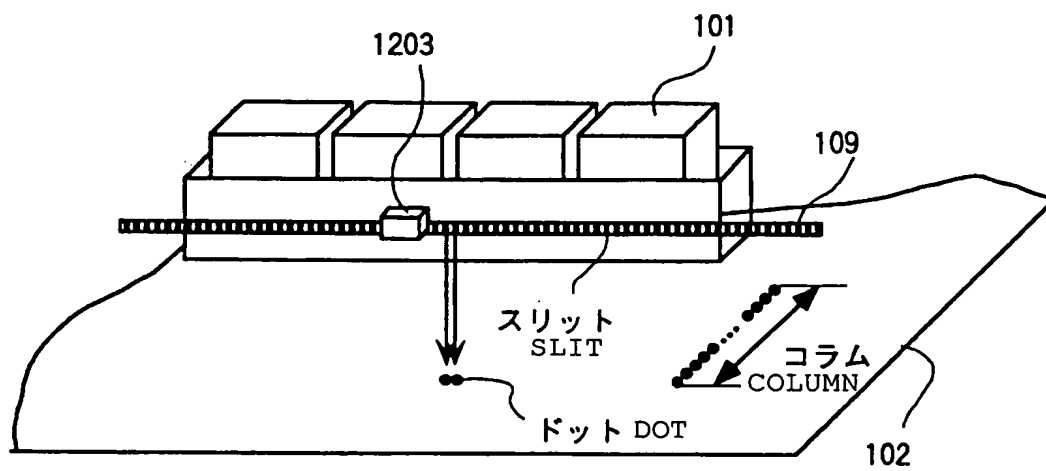


図 1 2
FIG.12



【図13】
FIG.13

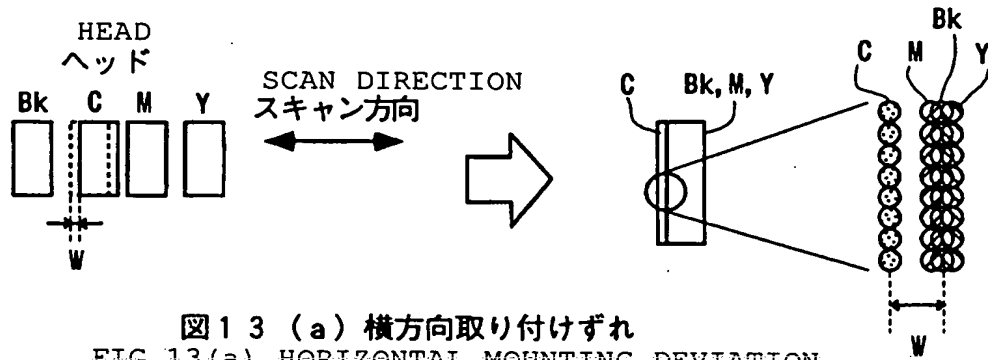


図13 (a) 横方向取り付けずれ
FIG.13(a) HORIZONTAL MOUNTING DEVIATION

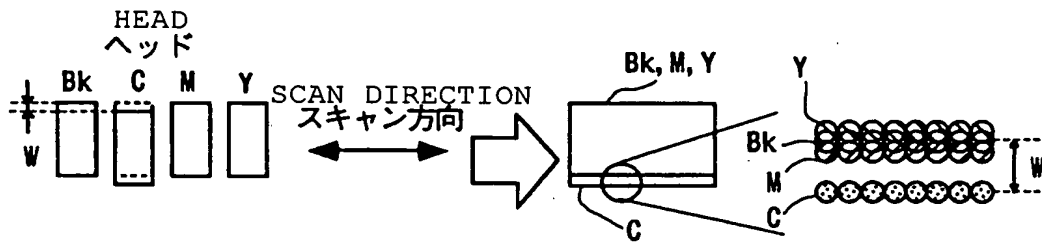


図13 (b) 縦方向取り付けずれ
FIG.13(b) VERTICAL MOUNTING DEVIATION


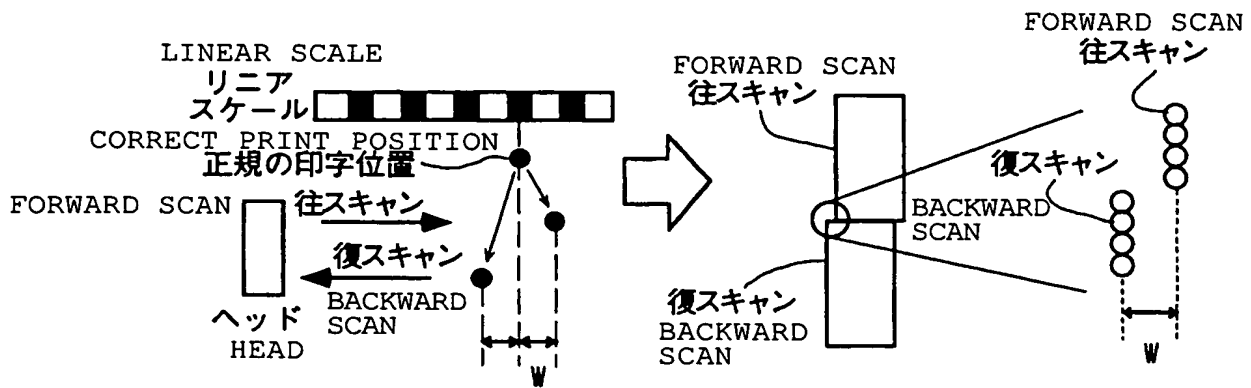


図13 (c) 往復印字ずれ
FIG.13(c) FORWARD/BACKWARD PRINT DEVIATION



【図14】
FIG.14

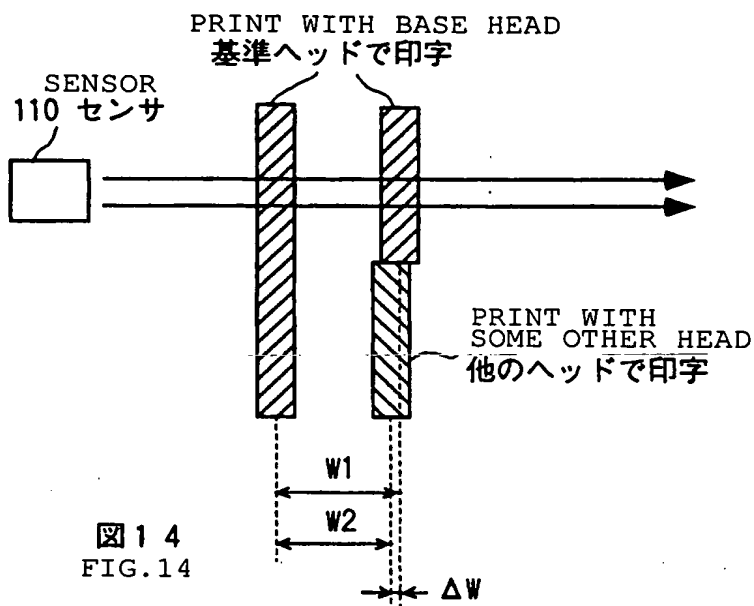


図14
FIG.14

【図15】
FIG.15

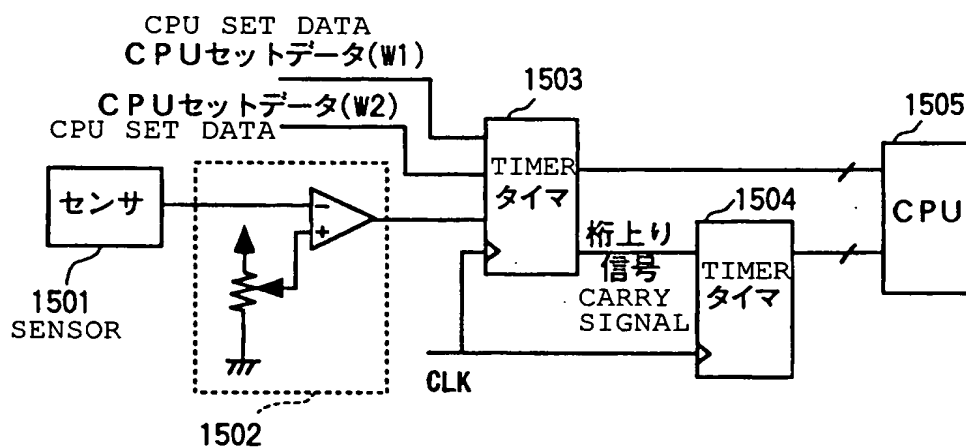


図15
FIG.15



【図16】
FIG.16


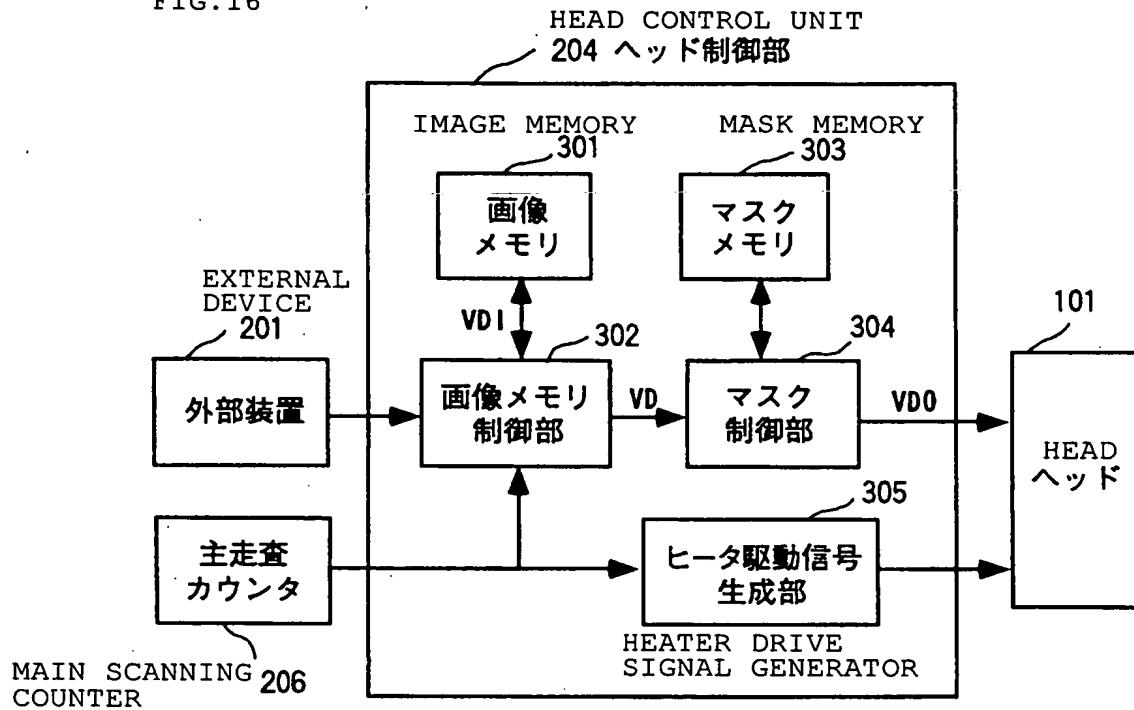


図16
FIG.16


302:
IMAGE MEMORY
CONTROL UNIT
304:
MASK
CONTROL UNIT



【図17】
FIG.17

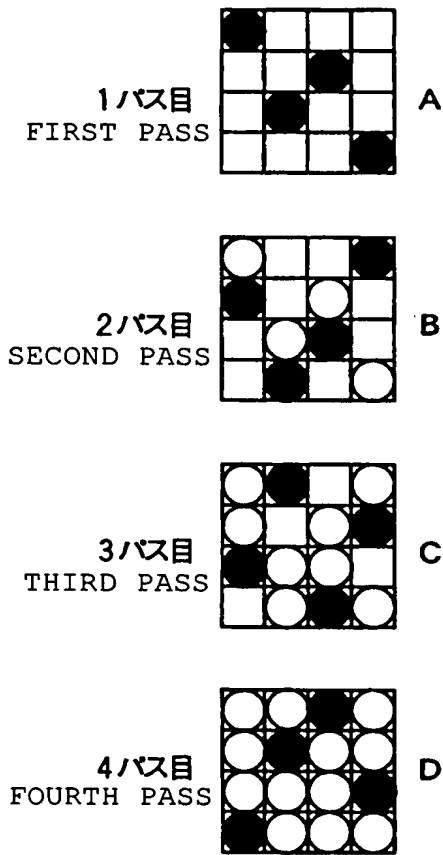

(a)

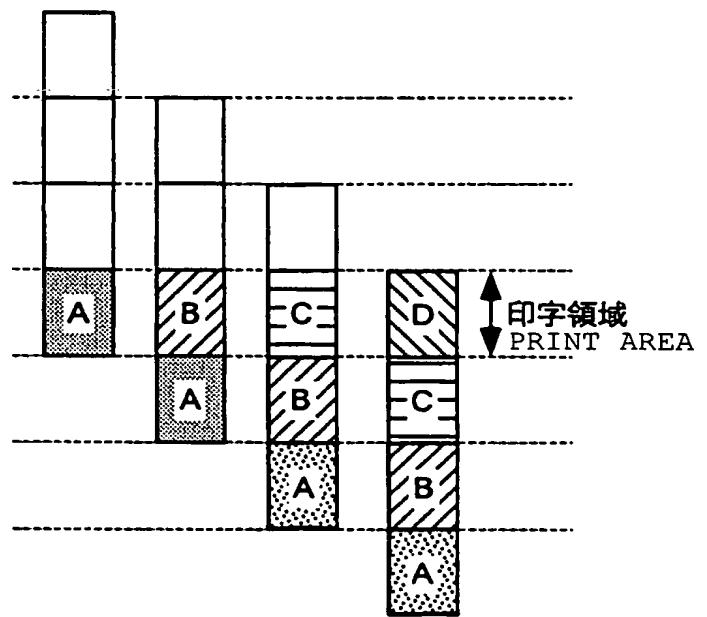

(b)

図17
FIG.17



【図18】
FIG.18

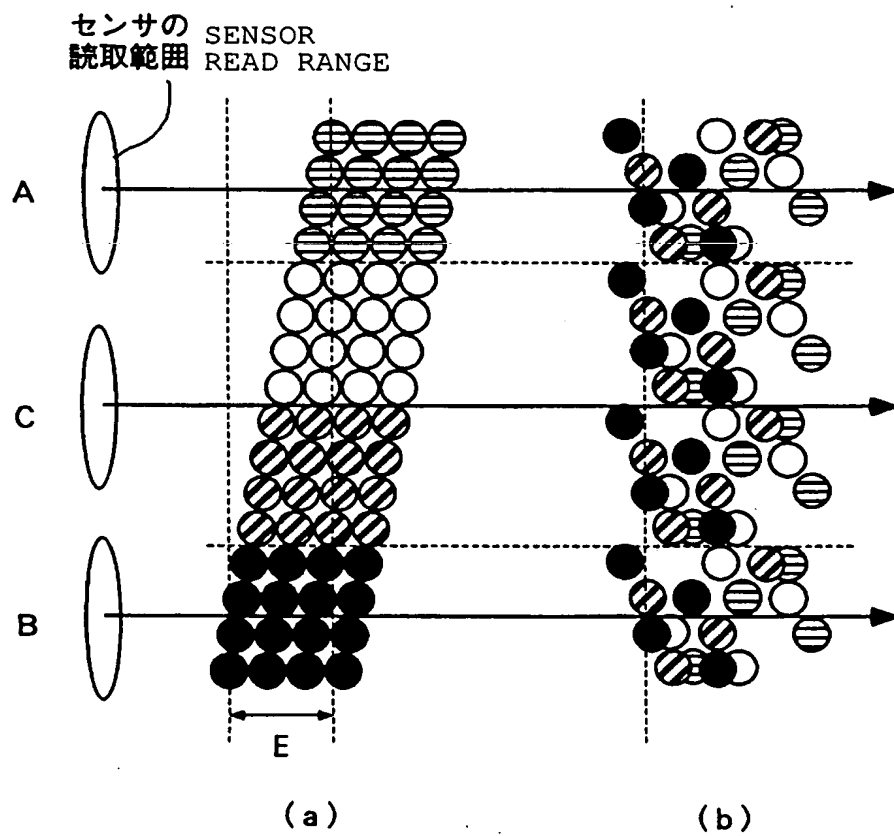


図18
FIG.18



【図19】
FIG.19

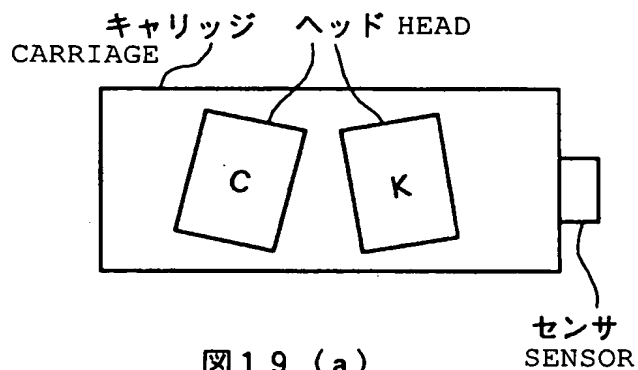


図19(a)
FIG.19(a)

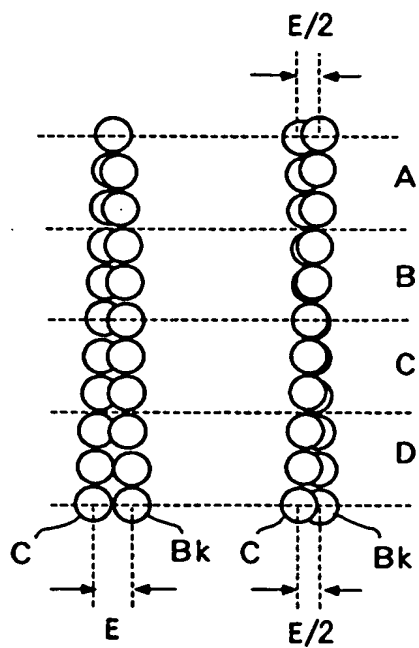


図19(b)
FIG.19(b)

図19(c)
FIG.19(c)

【図20】
FIG.20

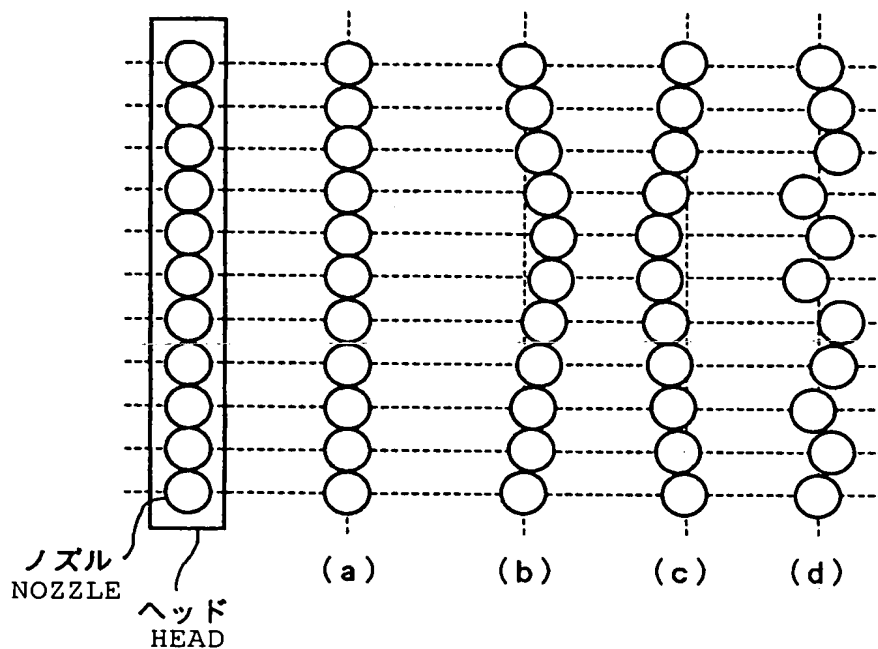


図20
FIG.20

【図21】
FIG.21


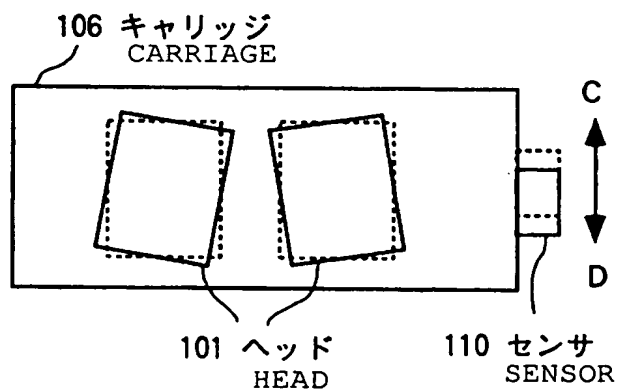


図21
FIG.21



【图 22】
FIG. 22

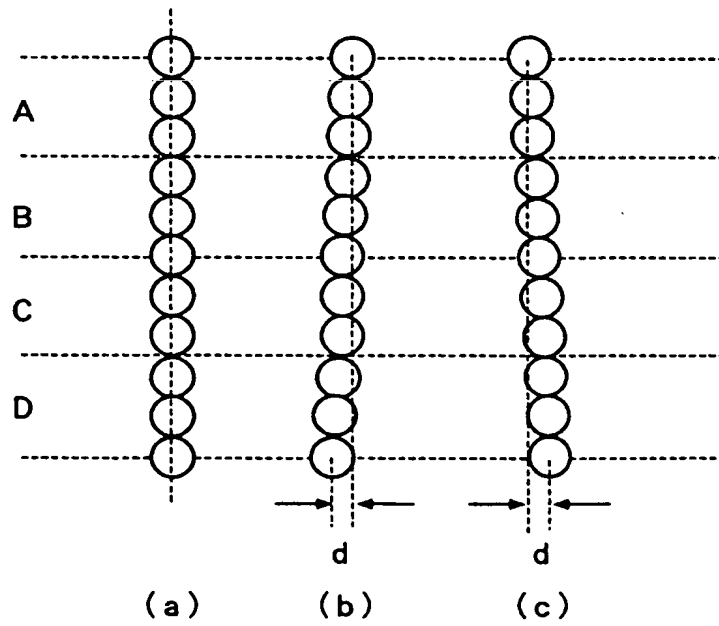

【图 22】
FIG. 22